


Euro pallet - TC1 - 1200 x 800 mm - with Anti-slip top deck - grey

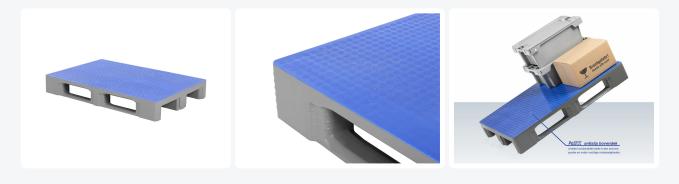

Product specifications

Weight (kg)	19 kg
External dimensions (L x W x H)	1200 × 800 × 160 mm
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Grey
Material	HDPE
Static load capacity	7500 kg
Dynamic load capacity	1250 kg
Load capacity in racks	1000 kg

Properties

request

The anti-slip strips prevent loads sliding off and mutual sliding of empty pallets
Connections of the pallet chocks to the runners and the pallet surface are extra reinforced. Breakage at these sensitive points is thus reduced to a minimum
Top and bottom pallet surface are completely smooth and unperforated without external rib structures
Intelligent design of the pallet chock ensures better grip of wrapping and stretch film
Raised rims around the TC1 prevent the load sliding off and mutual sliding of empty pallets
TC1 runners are chamfered on both edges
The TC pallet's patented weld geometry guarantees a high load capacity and long lifetime
Very high load capacity that is upgradable to 1750 kg in pallet racks using reinforcing sections: on



Transoplast +31(0)314 66 44 00 website@transoplast.com transoplast.com

Description

Gray Euro pallet type TC1 (1200 x 800 x H 160 mm) with non-slip top deck - suitable for foodstuffs. Executed with 3 longitudinal pallet runners, bottom blocks closed and runners on the underside with reinforcement ribs. The top and bottom pallet decks of the TC1 are completely smooth and closed without external rib structures, without rim. The top deck is fully equipped with a Palgrip non-slip surface. Static load capacity is 7500 kg, dynamic 1250 kg, and in pallet racks 1000 kg. With optional reinforcement profiles in the deck, the load capacity in pallet racks can even be increased to 1750 kg.



Alternative articles











Transoplast +31(0)314 66 44 00 website@transoplast.com transoplast.com