



Article number: 87065881

Printing possible

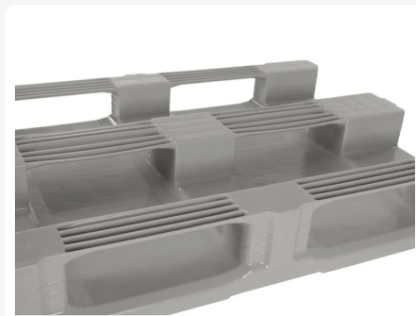

Euro pallet TC1 - 1200 x 800 mm - with 7 mm rims - 3 pallet runners - light grey

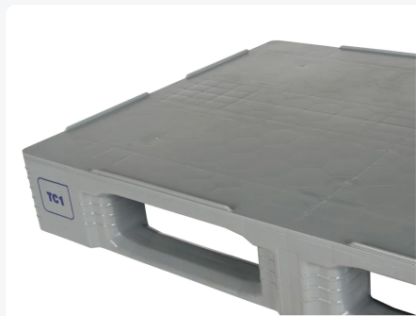

Product specifications

External dimensions (L x W x H)	1200 × 800 × 160 mm
Dynamic load capacity	1250 kg
Material	HDPE
Article number	87065881
Weight (kg)	18 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Grey
European Article Number	7424915316392
Static load capacity	7500 kg
Edge height	7 mm
Load capacity in racks	1000
Quantity per pallet	15

Properties

Top and underside of the pallet deck are completely smooth and closed

Maximum cleanability and hygiene

Manual cleaning is possible without any issues

Suitable for direct food contact

High impact resistance thanks to the patented welding of the top deck

Loads and empty pallets are secured and centred by 7 mm raised rims

High racking load capacity up to 1000 kg

By integrating 3 fully integrated longitudinal reinforcement profiles in the pallet deck, racking capacity can be increased up to 1750 kg: on request

Robust connection between pallet blocks and skids

Pallet skids are bevelled on both sides for smooth handling

Profiled block corners for improved grip of stretch and wrap film

Marking, logos and numbering on request; position to be agreed

Options: Pallet lid / pallet cover - fit-on rims - QR codes and barcodes - fully integrated longitudinal metal inserts - RFID transponders - rimless top deck - fully Palgrip anti-slip top deck

Description

The TC1 pallet is our fully closed plastic pallet in Euro format 1200 x 800 mm. This 3-skid version is also part of the Totally Closed (TC) range. This product range has proven itself many times over in the food industry, pharmaceuticals and the chemical industry — wherever cleanability and hygiene are essential.

Among pallets available on the market with a completely smooth and closed pallet deck, the TC pallet is the number one in terms of impact resistance. This is achieved through the patented welding of the top deck, featuring maximum wall thicknesses and an intelligently designed impact zone.

The pallet deck is fitted with 7 mm raised rims all around. In most cases, this is sufficient to centre both loads and empty pallets on top of each other. Practical tests are the best benchmark here. Where maximum anti-slip performance is required, our Palgrip version with an anti-slip top deck is the best solution.



Matching accessories



Alternative articles

