


Article number: 83310241

Printing possible



Industrial pallet D3-5 ECO – 1200 x 1000 mm – with 5 runners - with 7 mm rims – black

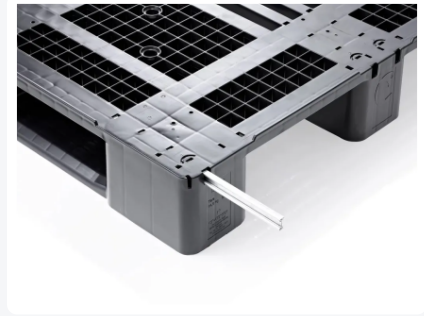

Product specifications

External dimensions (L x W x H)	1200 x 1000 x 150 mm
Dynamic load capacity	1000 kg
Material	Recycled ECO-HDPE
Article number	83310241
Weight (kg)	15 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Black
Static load capacity	5000 kg
Edge height	7 mm
Load capacity in racks	400
Quantity per pallet	16

Properties

Industrial pallet / ISO pallet type D3-5 ECO (1200 x 1000 x H 150 mm) with 7 mm raised rims around the deck

Strong medium-duty pallet with low tare weight; easy to handle

Equipped with 5 pallet skids: 3 longitudinal and 2 transverse

Load capacity can be significantly increased by adding corrosion-resistant reinforcement profiles in the pallet deck

Racking load capacity is 400 kg. When 3 longitudinal inserts are added, this increases to 1000 kg; with 4 longitudinal inserts, racking load capacity reaches 1250 kg

Undersides of blocks and skids open with reinforcement ribs

The D3-5 ECO pallet is extra strong due to the angled connection between skids and blocks

Pallet skids are bevelled on both sides for smooth handling

Made from high-quality ECO regranulate for high impact resistance and long service life

The D3-5 ECO pallet is widely used for custom-made plastic pallets – with or without reinforcement profiles in the deck

Options: Pallet lid / pallet cover – fit-on rims – QR codes and barcodes – RFID transponders – 22 mm deck rims – 22 mm rims beside the deck – rimless version (optional with pop-ups) – continuous anti-slip rubber strips for the deck

Description

Our D3-5 ECO plastic pallet is a true all-rounder and is therefore widely used throughout the logistics sector, particularly for medium-duty applications. Companies in the non-food sector as well as industry and trade successfully rely on this pallet. The pallet has a low tare weight, making it easy to handle. The D3-5 ECO can be upgraded from a medium pallet to a genuine rackable pallet by adding reinforcement profiles.

This D3-5 variant is equipped with 7 mm raised rims around the entire pallet deck. This prevents loads from slipping and stops empty pallets from sliding over one another. The D3-5 pallet has additional reinforcement at several potentially sensitive points, such as the transitions between pallet blocks, skids and the pallet deck. Manufactured from high-quality HDPE ECO regranulate for long-lasting use.

Matching accessories



Alternative articles

