
Article number: 87035341 Printing possible

Industrial pallet TC3 - 1200 x 1000 mm - with rims 7 mm - 3 runners - light blue





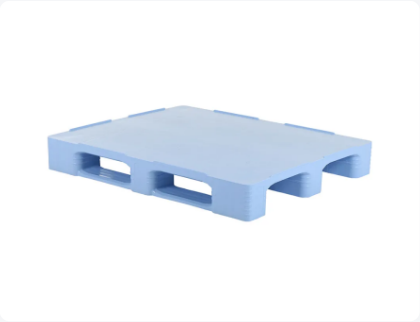

Product specifications

External dimensions (L x W x H)	1200 × 1000 × 160 mm
Dynamic load capacity	1500 kg
Material	HDPE
Article number	87035341
Weight (kg)	21,5 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Blue
Static load capacity	7500 kg
Edge height	7 mm
Load capacity in racks	1250
Quantity per pallet	15

Properties

- **TC pallets runners are chamfered on both edges**
- **Connections of the pallet chocks to the runners and the pallet surface are extra reinforced. Breakage at these sensitive points is thus reduced to a minimum**
- **Intelligent design of the pallet chock ensures better grip of wrapping and stretch film**
- **Raised rims around the TC3 prevent the load sliding off and mutual sliding of empty pallets**
- **The TC pallet's patented weld geometry guarantees a high load capacity and long lifetime**
- **Top and bottom pallet surface are completely smooth and unperforated without external rib structures**
- **Very high load capacity that is upgradable to 1750 kg in pallet racks using reinforcing sections: on request**

TRANSOPLAST
Improves your Logistics

Transoplast
+31 314 664400
website@transoplast.com
transoplast.com/wp

Description

Plastic industrial pallet TC3 1200 x 1000 mm with rims

Our plastic industrial pallet TC3 has external dimensions of 1200 x 1000 x H 160 mm and is fitted with three longitudinal pallet runners and raised rims of 7 mm. This light blue ISO pallet is made from high-quality virgin HDPE and is suitable for direct contact with food. The smooth, closed pallet deck makes the pallet easy to clean for use in logistics processes where hygiene is important.

Closed pallet deck for hygiene

The top and underside of the pallet deck are completely smooth and closed, allowing you to clean the surfaces easily. The underside of the pallet blocks is also smooth and closed. This design allows manual cleaning and provides an easy-to-clean basis for transporting and storing food.

Impact-resistant construction with pallet runners

The virgin HDPE and patented welding of the top deck provide high impact resistance, contributing to a long service life. The robust connections between the pallet blocks and the three pallet runners support the strength of the construction. The runners are chamfered on both sides for easier handling. Profiled block corners give wrapping and stretch film more grip when wrapping the load.

Raised rims for centring

The raised rims of 7 mm help centre goods and position empty pallets on top of each other. Whether this rim height provides sufficient support depends on your load and application; a practical test will clarify this. For applications requiring additional slip resistance, a version with a fully anti-slip top deck is available.

Load capacity in pallet racking

The TC3 has a static load capacity of 7500 kg, a dynamic load capacity of 1500 kg and a load capacity in pallet racking of 1250 kg. This allows you to assess the load capacity separately for storage, movement and racking use.
With three fully integrated longitudinal reinforcement profiles in the pallet deck, the load capacity in pallet racking can be increased to 2000 kg. This reinforcement is optional and is not part of the standard version.

Colour recognition and identification options

The light blue version allows differentiation from the standard grey version and is also used for optical detection. This enables you to use recognisable pallets within your logistics process.
On request, we can provide the pallet with lettering, a logo or numbering, with the position agreed in consultation. QR codes, barcodes and RFID transponders are available for identification. Additional options include a pallet lid or pallet cover, pallet collars and a top deck without rims or with rims of 22 mm, allowing you to adapt the version to your application.

Matching accessories



99.49716



83291800

TRANSOPLAST
Improves your Logistics

Transoplast
+31 314 664400
website@transoplast.com
transoplast.com/wp


Alternative articles




87035841



87035241



83335851



87039899

Transoplast
+31 314 664400
website@transoplast.com
transoplast.com/wp