


Article number: 83190800.DUOL1

Printing possible



Plastic pallet CS1-DUO - 2250 x 800 mm

- without rims - 3 pallet runners - reinforced

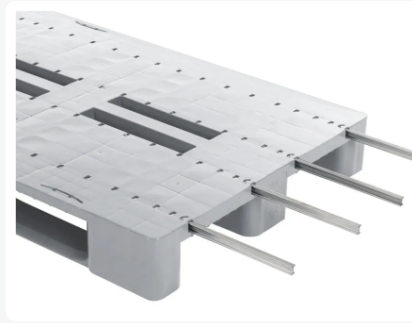

Product specifications

External dimensions (L x W x H)	2250 × 800 × 146 mm
Dynamic load capacity	1000 kg
Material	HDPE
Article number	83190800.DUOL1
Weight (kg)	30,5 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Grey
Static load capacity	5000 kg

Properties

Large-format plastic pallet size 2250 x 800 x H 146 mm

Made from high quality new virgin HDPE, exceptionally impact-resistant and durable

Suitable for non-food items and packed food products

The CS1-DUO is based on the CS1 pallet, without rims all around (alternative: with rims 7mm on the top deck)

In this version, two CS1 pallets are sustainably welded together

The CS1-DUO pallet is equipped with 3 pallet runners lengthwise

The deck is additionally reinforced with 4 integrated reinforcement profiles in the longitudinal direction; corrosion-resistant design

Extremely strong and robust, making it the ideal solution for large-format loads

RFID technology can be integrated into the pallet without any issues, even retrofitted. The RFID tag holder provides long-lasting protection against external influences

CS1 pallet runners are chamfered on both sides for smooth handling with pallet trucks

The rimless CS1-DUO version prevents damage to large-format products such as panels and (cardboard) sheets in sectors like the packaging industry.

The CS1 DUO pallet is extra strong thanks to an angled connection between the pallet runners and the blocks

This minimises breakage at these sensitive points

The stated dynamic load is based on an evenly distributed load and a wide forklift tine position

Description

Plastic large-format pallet (2250 x 800 x H 146 mm), type CS1-DUO, made from high quality new virgin HDPE. Based on two pallets of type CS1, which are sawn and then sustainably welded together. Equipped with 3 pallet runners longitudinally, underside with blocks and pallet runners open (ribbed). Without rims on the pallet deck. The top deck is supplied as standard with 4 reinforcement profiles in the longitudinal direction. Static load capacity is 5000 kg and dynamic load capacity 1000 kg. Maximum dynamic load of 1000 kg with evenly distributed load and a wide forklift tine position. Also available in a version with rims 7mm on the top deck. Various organisations use DUO pallets to their full satisfaction.

General

The dimensions of custom-made pallets are aligned with the customer's requirements as much as possible. However, the existing pallet construction is decisive for the welding work. As a result, the achievable dimensions may deviate by a few centimetres.

