



Article number: 83229801.DUOL1

Printing possible

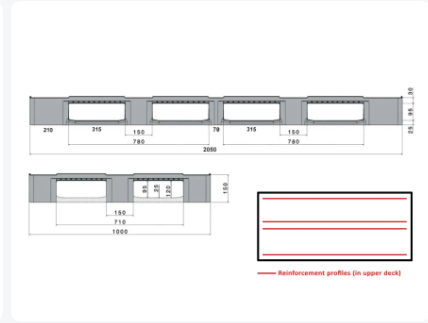

Plastic pallet CS3-DUO ECO - 2050 x 1000 mm - with 7 mm rims all around - 3 pallet runners - reinforced

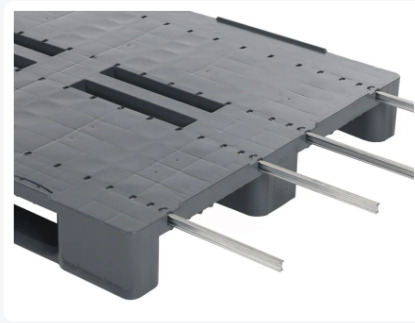

Product specifications

External dimensions (L x W x H)	2050 x 1000 x 150 mm
Dynamic load capacity	1000 kg
Material	Recycled ECO-HDPE
Article number	83229801.DUOL1
Weight (kg)	27,5 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Grey
Static load capacity	5000 kg
Edge height	7 mm

Properties

Large-format plastic pallet size 2000 x 1200 x H 160 mm

Made from ECO regranulate, exceptionally impact-resistant and durable

Suitable for non-food items and packed food products

The CS3-DUO ECO is based on the CS3 ECO pallet, with 7 mm rims all around (alternative: without rims)

In this version, two CS3 ECO pallets are sustainably welded together

The CS3-DUO pallet is equipped with 3 pallet runners lengthwise

The deck is additionally reinforced with 4 integrated reinforcement profiles in the longitudinal direction; corrosion-resistant design

Extremely strong and robust, making it the ideal solution for large-format loads

RFID technology can be integrated into the pallet without any issues, even retrofitted. The RFID tag holder provides long-lasting protection against external influences

CS3 pallet runners are chamfered on both sides for smooth handling with pallet trucks

The raised rims around the CS3 prevent the load from sliding off and prevent empty pallets from shifting against each other

The CS3 pallet is extra strong thanks to an angled connection between the pallet runners and the blocks

This minimises breakage at these sensitive points

The stated dynamic load is based on an evenly distributed load and a wide forklift tine position

Description

Plastic large-format pallet (2000 x 1210 x H 150 mm), type CS3-DUO ECO, made from robust ECO regranulate. Based on two pallets of type CS3 ECO, which are sawn and then sustainably welded together. Equipped with 3 pallet runners longitudinally, underside with blocks and pallet runners open (ribbed). With 7 mm rims all around. The top deck is supplied as standard with 4 reinforcement profiles in the longitudinal direction. Static load capacity is 5000 kg and dynamic load capacity 1000 kg. Maximum dynamic load of 1000 kg with evenly distributed load and a wide forklift tine position. Also available in a version without rims on the top deck. Various organisations use DUO pallets to their full satisfaction.

General

The dimensions of custom-made pallets are aligned with the customer's requirements as much as possible. However, the existing pallet construction is decisive for the welding work. As a result, the achievable dimensions may deviate by a few centimetres.

Alternative articles

