
Article number: 83325201.DUOL1 Printing possible

# Plastic pallet D3-DUO ECO - 2050 x 1000 mm - with 7 mm rims all around - 3 pallet runners - reinforced





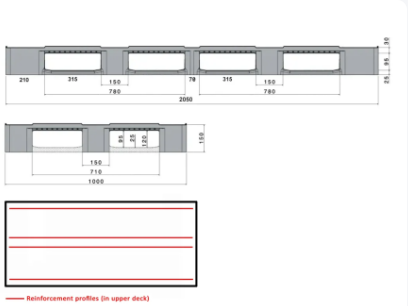

TRANSOPLAST
Improves your Logistics

**Transoplast**
+31(0)314 66 44 00
website@transoplast.com
transoplast.com

## Product specifications

| | |
|---|---|
| External dimensions ( L x W x H) | 2050 × 1000 × 150 mm |
| Dynamic load capacity | 1000 kg |
| Material | Recycled ECO-HDPE |
| Article number | 83325201.DUOL1 |
| Weight (kg) | 30 kg |
| Temperature range | -30°C to +40°C, briefly up to +90°C |
| Color | Black |
| Static load capacity | 5000 kg |
| Edge height | 7 mm |

## Properties

- **Large-format plastic pallet size 2050 x 1000 x H 150 mm**
- **Made from ECO regranulate, exceptionally impact-resistant and durable**
- **Suitable for non-food items and packed food products**
- **The D3-DUO ECO is based on the D3 ECO pallet, with 7 mm rims all around (alternative: without rims)**
- **In this version, two D3 ECO pallets are sustainably welded together**
- **The D3-DUO pallet is equipped with 3 pallet runners lengthwise**
- **The deck is additionally reinforced with 4 integrated reinforcement profiles in the longitudinal direction; corrosion-resistant design**
- **Extremely strong and robust, making it the ideal solution for large-format loads**
- **RFID technology can be integrated into the pallet without any issues, even retrofitted. The RFID tag holder provides long-lasting protection against external influences**
- **D3 pallet runners are chamfered on both sides for smooth handling with pallet trucks**
- **The raised rims around the D3 prevent the load from sliding off and prevent empty pallets from shifting against each other**
- **The D3 pallet is extra strong thanks to an angled connection between the pallet runners and the blocks**
- **This minimises breakage at these sensitive points**
- **The stated dynamic load is based on an evenly distributed load and a wide forklift tine position**

## Description

Plastic large-format pallet (2050 x 1000 x H 150 mm), type D3-DUO ECO, made from robust ECO regranulate. Based on two pallets of type D3 ECO, which are sawn and then sustainably welded together. Equipped with 3 pallet runners longitudinally, underside with blocks and pallet runners open (ribbed). With 7 mm rims all around. The top deck is supplied as standard with 4 reinforcement profiles in the longitudinal direction. Static load capacity is 5000 kg and dynamic load capacity 1000 kg. Maximum dynamic load of 1000 kg with evenly distributed load and a wide forklift tine position. Also available in a version without rims on the top deck. Various organisations use large-format pallets to their full satisfaction.

General

The dimensions of custom-made pallets are aligned with the customer’s requirements as much as possible. However, the existing pallet construction is decisive for the welding work. As a result, the achievable dimensions may deviate by a few centimetres.



**Transoplast**
+31(0)314 66 44 00
website@transoplast.com
transoplast.com

## Alternative articles



83325201

**Transoplast**
+31(0)314 66 44 00
website@transoplast.com
transoplast.com