


Article number: 83325201.DUOL1

Printing possible



Plastic pallet D3-DUO ECO - 2050 x 1000 mm - with 7 mm rims all around - 3 pallet runners - reinforced

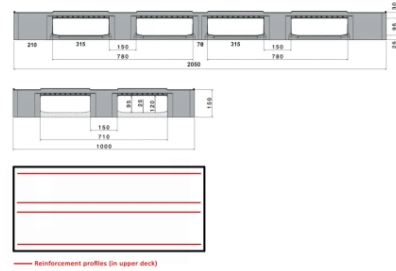

Product specifications

External dimensions (L x W x H)	2050 x 1000 x 150 mm
Dynamic load capacity	1000 kg
Material	Recycled ECO-HDPE
Article number	83325201.DUOL1
Weight (kg)	30 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Black
Static load capacity	5000 kg
Edge height	7 mm

Properties

Large-format plastic pallet size 2050 x 1000 x H 150 mm

Made from ECO regranulate, exceptionally impact-resistant and durable

Suitable for non-food items and packed food products

The D3-DUO ECO is based on the D3 ECO pallet, with 7 mm rims all around (alternative: without rims)

In this version, two D3 ECO pallets are sustainably welded together

The D3-DUO pallet is equipped with 3 pallet runners lengthwise

The deck is additionally reinforced with 4 integrated reinforcement profiles in the longitudinal direction; corrosion-resistant design

Extremely strong and robust, making it the ideal solution for large-format loads

RFID technology can be integrated into the pallet without any issues, even retrofitted. The RFID tag holder provides long-lasting protection against external influences

D3 pallet runners are chamfered on both sides for smooth handling with pallet trucks

The raised rims around the D3 prevent the load from sliding off and prevent empty pallets from shifting against each other

The D3 pallet is extra strong thanks to an angled connection between the pallet runners and the blocks

This minimises breakage at these sensitive points

The stated dynamic load is based on an evenly distributed load and a wide forklift tine position

Description

Plastic large-format pallet (2050 x 1000 x H 150 mm), type D3-DUO ECO, made from robust ECO regranulate. Based on two pallets of type D3 ECO, which are sawn and then sustainably welded together. Equipped with 3 pallet runners longitudinally, underside with blocks and pallet runners open (ribbed). With 7 mm rims all around. The top deck is supplied as standard with 4 reinforcement profiles in the longitudinal direction. Static load capacity is 5000 kg and dynamic load capacity 1000 kg. Maximum dynamic load of 1000 kg with evenly distributed load and a wide forklift tine position. Also available in a version without rims on the top deck. Various organisations use large-format pallets to their full satisfaction.

General

The dimensions of custom-made pallets are aligned with the customer's requirements as much as possible. However, the existing pallet construction is decisive for the welding work. As a result, the achievable dimensions may deviate by a few centimetres.

Alternative articles

