
Article number: 83325201.TRIO1 Printing possible

Plastic pallet D3-TRIO ECO - 3030 x 1000 mm - with 7 mm rims all around - 3 pallet runners - reinforced





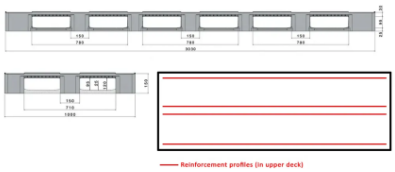

Transoplast
+31 314 664400
website@transoplast.com
transoplast.com/wp

Product specifications

External dimensions (L x W x H)	3030 × 1000 × 150 mm
Dynamic load capacity	1000 kg
Material	Recycled ECO-HDPE
Article number	83325201.TRIO1
Weight (kg)	48 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Black
Static load capacity	5000 kg
Edge height	7 mm

Properties

- **Large-format plastic pallet size 3030 x 1000 x H 150 mm, with 7 mm rims all around**
- **Made from ECO regranulate, exceptionally impact-resistant and durable**
- **Suitable for non-food and packed food products**
- **The D3-TRIO ECO is based on the D3 ECO pallet (alternative: without rims)**
- **In this version, three D3 ECO pallets are sustainably welded together**
- **The D3-TRIO pallet is equipped with 3 pallet runners lengthwise**
- **The deck is additionally reinforced with 6 integrated reinforcement profiles (4 longitudinal and 2 crosswise); corrosion-resistant design**
- **Extremely strong and robust, making it the ideal solution for large-format loads**
- **RFID technology can be integrated into the pallet without any issues, even retrofitted. The RFID tag holder provides long-lasting protection against external influences**
- **The three pallet runners are chamfered on both sides for smooth handling with pallet trucks**
- **The raised rims around the D3 prevent the load from sliding off and prevent empty pallets from shifting against each other**
- **The D3 pallet is extra strong thanks to an angled connection between the pallet runners and the blocks**
- **This minimises breakage at these sensitive points**
- **The stated dynamic load is based on an evenly distributed load and a wide forklift tine position**

Description

Plastic large-format pallet (3030 x 1000 x H 150 mm), type D3-TRIO ECO, made from robust ECO regranulate. Based on three pallets of type D3 ECO, which are sawn and then sustainably welded together. Equipped with 3 pallet runners longitudinally, underside with blocks and pallet runners open (ribbed). With 7 mm rims all around. The top deck is supplied as standard with 4 reinforcement profiles in the longitudinal direction and 2 crosswise. Static load capacity is 5000 kg and dynamic load capacity 1000 kg. Maximum dynamic load of 1000 kg with evenly distributed load and a wide forklift tine position. Also available as a D3-5 TRIO version with 4 additional cross runners on the 1000 mm side and without rims on the top deck. Various organisations use the large-format pallets to their full satisfaction.

General

The dimensions of custom-made pallets are aligned with the customer's requirements as much as possible. However, the existing pallet construction is decisive for the welding work. As a result, the achievable dimensions may deviate by a few centimetres.

TRANSOPLAST
Improves your Logistics

Transoplast
+31 314 664400
website@transoplast.com
transoplast.com/wp

Alternative articles



83325201

Transoplast
+31 314 664400
website@transoplast.com
transoplast.com/wp