
Article number: 83520861.DUOB2A Printing possible

# Plastic pallet E3-5-DUO ECO - 1600 x 1200 mm - with 5 mm rims all around - 2 pallet runners - reinforced



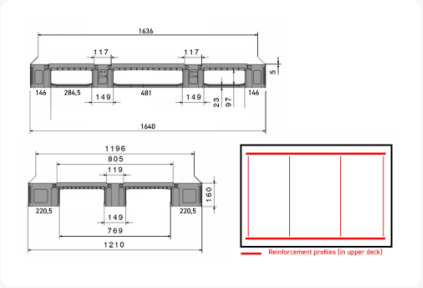


TRANSOPLAST
Improves your Logistics

**Transoplast**
+31 314 664400
website@transoplast.com
transoplast.com/wp

## Product specifications

| | |
|---|---|
| External dimensions ( L x W x H) | 1600 × 1200 × 160 mm |
| Dynamic load capacity | 1250 kg |
| Material | Recycled ECO-HDPE |
| Article number | 83520861.DUOB2A |
| Weight (kg) | 33 kg |
| Temperature range | -30°C to +40°C, briefly up to +90°C |
| Color | Grey |
| Static load capacity | 7500 kg |
| Edge height | 5 mm |

## Properties

- **Large-format plastic pallet size 1600 x 1200 x H 160 mm**
- **Made from ECO regranulate, exceptionally impact-resistant and durable**
- **Suitable for non-food items and packed food products**
- **The E3-5-DUO ECO is based on the E3-5 ECO pallet, with 5 mm rims all around (alternative: without rims)**
- **In this version, two E3-5 ECO pallets are sustainably welded together**
- **The E3-5-DUO ECO pallet is equipped with 2 pallet runners lengthwise**
- **The deck is additionally reinforced with 2 integrated reinforcement profiles lengthwise and 4 crosswise; corrosion-resistant design**
- **Extremely strong and robust, making it the ideal solution for large-format loads**
- **RFID technology can be integrated into the pallet without any issues, even retrofitted. The RFID tag holder provides long-lasting protection against external influences**
- **E3-5 pallet runners are chamfered on both sides for smooth handling with pallet trucks**
- **The raised rims around the E3-5 prevent the load from sliding off and prevent empty pallets from shifting against each other**
- **The E3-5 pallet is extra strong thanks to an angled connection between the pallet runners and the blocks**
- **This minimises breakage at these sensitive points**
- **The stated dynamic load is based on an evenly distributed load and a wide forklift tine position**

## Description

Plastic large-format pallet (1600 x 1200 x H 160 mm), type E3-5-DUO ECO, made from robust ECO regranulate. Based on two pallets of type E3-5 ECO, which are sawn and then sustainably welded together. Equipped with 2 pallet runners longitudinally, underside with blocks and pallet runners open (ribbed). With 5 mm rims all around. The top deck is supplied as standard with 2 reinforcement profiles in the longitudinal direction and 4 crosswise. Static load capacity is 7500 kg and dynamic load capacity 1250 kg. Maximum dynamic load of 1250 kg with evenly distributed load and a wide forklift tine position. Also available in a version without rims on the top deck. Various organisations use the large-format pallets to their full satisfaction.

General

The dimensions of custom-made pallets are aligned with the customer’s requirements as much as possible. However, the existing pallet construction is decisive for the welding work. As a result, the achievable dimensions may deviate by a few centimetres.



**Transoplast**
+31 314 664400
website@transoplast.com
transoplast.com/wp

## Alternative articles



83520861

**Transoplast**
+31 314 664400
website@transoplast.com
transoplast.com/wp