


Article number: 83520861.DUO

Printing possible



Plastic pallet E3-5-DUO ECO - 2000 x 1200 mm - with 5 mm rims all around - 5 pallet runners - reinforced

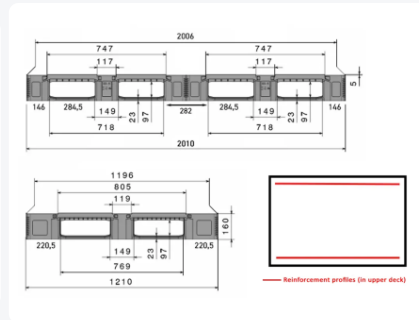

Product specifications

External dimensions (L x W x H)	2000 x 1200 x 160 mm
Dynamic load capacity	1250 kg
Material	Recycled ECO-HDPE
Article number	83520861.DUO
Weight (kg)	43 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Grey
Static load capacity	7500 kg
Edge height	5 mm
Load capacity in racks	1000

Properties

Large-format plastic pallet size 2000 x 1200 x H 160 mm

Made from ECO regranulate, exceptionally impact-resistant and durable

Suitable for non-food items and packed food products

The E3-5-DUO ECO is based on the E3-5 ECO pallet, with 5 mm rims all around (alternative: without rims)

In this version, two E3-5 ECO pallets are sustainably welded together

The E3-5-DUO pallet is equipped with 2 pallet runners lengthwise and 5 crosswise

The deck is additionally reinforced with 2 integrated reinforcement profiles in the longitudinal direction; corrosion-resistant design

Extremely strong and robust, making it the ideal solution for large-format loads

RFID technology can be integrated into the pallet without any issues, even retrofitted. The RFID tag holder provides long-lasting protection against external influences

E3-5 pallet runners are chamfered on both sides for smooth handling with pallet trucks

The raised rims around the E3-5 prevent the load from sliding off and prevent empty pallets from shifting against each other

The E3-5 pallet is extra strong thanks to an angled connection between the pallet runners and the blocks

This minimises breakage at these sensitive points

The stated dynamic load is based on an evenly distributed load and a wide forklift tine position

Description

Plastic large-format pallet (2000 x 1200 x H 160 mm), type E3-5-DUO ECO, made from robust ECO regranulate. Based on two pallets of type E3-5 ECO, which are sawn and then sustainably welded together. Equipped with 2 pallet runners longitudinally and 5 crosswise, underside with blocks and pallet runners open (ribbed). With 5 mm rims all around. The top deck is supplied as standard with 2 reinforcement profiles in the longitudinal direction. Static load capacity is 7500 kg and dynamic load capacity 1250 kg. Maximum dynamic load of 1250 kg with evenly distributed load and a wide forklift tine position. Also available in a version without rims on the top deck. Various organisations use the large-format pallets to their full satisfaction.

General

The dimensions of custom-made pallets are aligned with the customer's requirements as much as possible. However, the existing pallet construction is decisive for the welding work. As a result, the achievable dimensions may deviate by a few centimetres.

Alternative articles

