




Plastic pallet TC1-DUO - 1600 x 1200 mm - with 7 mm rims - 5 pallet runners

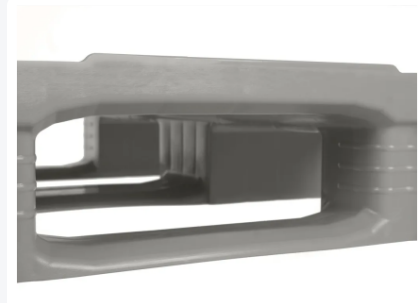

Product specifications

External dimensions (L x W x H)	1600 × 1200 × 160 mm
Dynamic load capacity	1250 kg
Material	HDPE
Article number	87065881.DUO
Weight (kg)	36 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Grey
Static load capacity	7500 kg
Edge height	7 mm

Properties

Large-format plastic pallet size 1600 x 1200 x H 160 mm

Made from HDPE

Suitable for food applications (food-safe)

The TC1-DUO is based on the TC1 pallet, with 7 mm rims all around (alternative: without rims)

In this version, two TC1 pallets are sustainably welded together

The TC1-DUO pallet is equipped with 5 pallet runners lengthwise

Extremely strong and robust, making it the ideal solution for large-format loads

TC1 pallet runners are chamfered on both sides for smooth handling with pallet trucks

The raised rims around the TC1 prevent the load from sliding off and prevent empty pallets from shifting against each other

The TC1 pallet is extra strong thanks to an angled connection between the pallet runners and the blocks

This minimises breakage at these sensitive points

The stated dynamic load is based on an evenly distributed load and a wide forklift tine position

Description

Plastic large-format pallet (1600 x 1200 x H 160 mm), type TC1-DUO – food-safe. Based on two TC1 pallets, which are then sustainably welded together. Equipped with 5 pallet runners lengthwise, underside with closed blocks. The top and bottom deck of the TC1-DUO are completely smooth and closed, without external rib structures, with 7 mm rims all around. Static load capacity is 7500 kg, dynamic load capacity 1500 kg. Maximum dynamic load of 1500 kg with evenly distributed load and a wide forklift tine position. Various organisations use large-format pallets to their full satisfaction.

General

The dimensions of custom-made pallets are aligned with the customer's requirements as much as possible. However, the existing pallet construction is decisive for the welding work. As a result, the achievable dimensions may deviate by a few centimetres.



Alternative articles

