
Article number: 83520861.TRIO Printing possible

Plastic pallet E3-5-TRIO ECO - 3000 x 1200 mm - with 5 mm rims all around - 9 pallet runners - reinforced



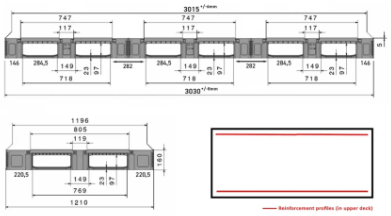

TRANSOPLAST
Improves your Logistics

Transoplast
+31 314 664400
website@transoplast.com
transoplast.com/wp

Product specifications

External dimensions (L x W x H)	3000 × 1200 × 160 mm
Dynamic load capacity	1250 kg
Material	Recycled ECO-HDPE
Article number	83520861.TRIO
Weight (kg)	64,5 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Grey
Static load capacity	7500 kg
Edge height	5 mm

Properties

- **Large-format plastic pallet size 3000 x 1200 x H 160 mm**
- **Made from ECO regranulate, exceptionally impact-resistant and durable**
- **Suitable for non-food items and packed food products**
- **The E3-5-TRIO ECO is based on the E3-5 ECO pallet, with 5 mm rims all around (alternative: without rims)**
- **In this version, three E3-5 ECO pallets are sustainably welded together**
- **The E3-5-TRIO pallet is equipped with 2 pallet runners lengthwise and 7 crosswise**
- **The deck is additionally reinforced with 2 integrated reinforcement profiles in the longitudinal direction; corrosion-resistant design**
- **Extremely strong and robust, making it the ideal solution for large-format loads**
- **RFID technology can be integrated into the pallet without any issues, even retrofitted. The RFID tag holder provides long-lasting protection against external influences**
- **E3-5 pallet runners are chamfered on both sides for smooth handling with pallet trucks**
- **The raised rims around the E3-5 prevent the load from sliding off and prevent empty pallets from shifting against each other**
- **The E3-5 pallet is extra strong thanks to an angled connection between the pallet runners and the blocks**
- **This minimises breakage at these sensitive points**
- **The stated dynamic load is based on an evenly distributed load and a wide forklift tine position**

Transoplast
+31 314 664400
website@transoplast.com
transoplast.com/wp

Description

Large-format plastic pallet 3000 x 1200 mm

For your large-format loads, we supply the E3-5-TRIO ECO plastic pallet with dimensions of 3000 x 1200 x H 160 mm. This grey custom-made pallet is constructed from three E3-5 ECO pallets that are sawn and welded together. This creates one large load-bearing surface for non-food items and packaged food products.

Construction with nine pallet runners

The pallet has two pallet runners lengthwise and seven crosswise. The underside of the blocks and pallet runners is open and ribbed. Two integrated, corrosion-resistant reinforcement profiles running lengthwise reinforce the pallet deck for carrying large-format loads. The raised rims of 5 mm all around help prevent your load from sliding off the deck and limit empty pallets from shifting against one another.

HDPE ECO regranulate

This plastic pallet is made from impact-resistant HDPE ECO regranulate and weighs 64,5 kg. The material withstands temperatures from -30 °C to +40 °C and briefly up to +90 °C, allowing you to use the pallet within this temperature range.

Static and dynamic load capacity

The static load capacity is 7500 kg. When moved with a forklift, the dynamic load capacity is 1250 kg, provided that the load is evenly distributed and the forklift has a wide fork position. Take these conditions into account when loading and moving your pallet.

RFID and custom-made version

RFID technology can also be retrofitted to the pallet, allowing you to incorporate it into your identification process. The holder protects the RFID tag against external influences.
We also supply this large-format pallet in a version without raised rims. For custom-made products, we tailor the dimensions to your requirements as closely as possible. However, the existing pallet construction determines where welding can be carried out, which means that the achievable dimensions may vary by a few centimetres.

Transoplast
+31 314 664400
website@transoplast.com
transoplast.com/wp