

Article number: 87035841.DUO Printing possible

Plastic pallet TC3-DUO - 2000 x 1200 mm - with 7 mm rims all around - 5 pallet runners





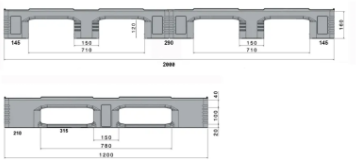

Product specifications

External dimensions (L x W x H)	2000 × 1200 × 160 mm
Dynamic load capacity	1500 kg
Material	HDPE
Article number	87035841.DUO
Weight (kg)	43 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Grey
Static load capacity	7500 kg
Edge height	7 mm

Properties

- **Large-format plastic pallet size 2000 x 1200 x H 160 mm**
- **Made from HDPE**
- **Suitable for food applications (food-safe)**
- **The TC3-DUO is based on the TC3 pallet**
- **In this version, two TC3 pallets are sustainably welded together**
- **The TC3-DUO pallet is equipped with 5 pallet runners lengthwise**
- **Extremely strong and robust, making it the ideal solution for large-format loads**
- **TC3 pallet runners are chamfered on both sides for smooth handling with pallet trucks**
- **The raised rims around the TC3 prevent the load from sliding off and prevent empty pallets from shifting against each other**
- **The TC3 pallet is extra strong thanks to an angled connection between the pallet runners and the blocks**
- **This minimises breakage at these sensitive points**
- **The stated dynamic load is based on an evenly distributed load and a wide forklift tine position**

TRANSOPLAST
Improves your Logistics

Transoplast
+31(0)314 66 44 00
website@transoplast.com
transoplast.com/wp

Description

Plastic large-format pallet (2000 x 1200 x H 160 mm), type TC3-DUO – food-safe. Based on two TC3 pallets, which are then sustainably welded together. Equipped with 5 pallet runners lengthwise, underside with closed blocks. The top and bottom deck of the TC3-DUO are completely smooth and closed, without external rib structures, with 7 mm rims all around. Static load capacity is 7500 kg, dynamic load capacity 1500 kg. Maximum dynamic load of 1500 kg with evenly distributed load and a wide forklift tine position. Various organisations use DUO pallets to their full satisfaction.

General

The dimensions of custom-made pallets are aligned with the customer's requirements as much as possible. However, the existing pallet construction is decisive for the welding work. As a result, the achievable dimensions may deviate by a few centimetres.

Alternative articles



87065881.DUO



83102216.TRIO



87065881

Transoplast
+31(0)314 66 44 00
website@transoplast.com
transoplast.com/wp