
Article number: 83229811 Printing possible

Industrial pallet CS3 ECO - 1200 x 1000 mm - with 7 mm rims - 3 pallet skids, completely smooth and closed - dark grey



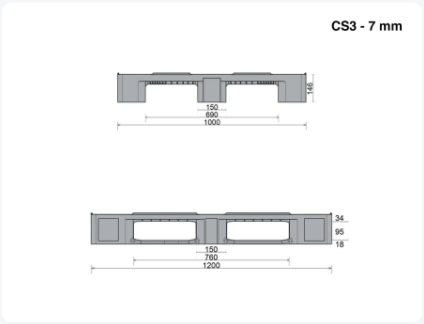

Product specifications

External dimensions (L x W x H)	1200 × 1000 × 150 mm
Dynamic load capacity	1000 kg
Material	Recycled HDPE
Article number	83229811
Weight (kg)	19 kg
Temperature range	-30°C to +40°C, briefly up to +90°C
Color	Grey
Static load capacity	5000 kg
Edge height	7 mm
Load capacity in racks	800
Quantity per pallet	16

Properties

- **The CS3-ECO is a medium-duty industrial pallet that can be configured modularly**
- **This CS3-ECO has fully closed pallet skids - for optimum hygiene and smooth running on roller conveyors**
- **Equipped with 7 mm raised rims all around**
- **Partly due to the closed skid construction, this CS3-ECO has a racking load capacity of 800 kg**
- **The CS3-ECO is produced from homogeneous ECO regranulate with consistent product quality. The base material is highly impact resistant and offers a long service life**
- **Marking, logos or numbering on request; location to be agreed**
- **Options: closed pallet skids - corrosion-resistant reinforcement profiles (max. 4) - QR codes and barcodes - RFID transponders - Palgrip anti-slip under the skids - ESD version - version without rims, with 7 or 22 mm deck rims, with 22 mm rims along the deck - pallet lid / pallet cover - fit-on rims**

TRANSOPLAST
Improves your Logistics

Transoplast
+31(0)314 66 44 00
website@transoplast.com
transoplast.com

Description

The CS3 industrial pallet is a medium-duty pallet that can be configured modularly, making it suitable for almost any application. The CS3-ECO is supplied as standard with 7 mm raised rims. These provide good centring of loads and of empty pallets stacked on top of each other. The pallet is produced from homogeneous ECO regranulate with consistent product quality. Thanks to the high-quality feedstock, the pallet is particularly robust and impact resistant, with a long service life. As a result, the CS3-ECO can be offered at an attractive price - that is the base.

The CS3-ECO shown here is **modularly supplemented with**: **closed pallet skids**. The skids are designed smooth and closed for optimum hygiene. In addition, this closed skid construction provides higher load capacity (up to 800 kg in racking with closed skids) and smooth running on roller conveyors.

Optional:

The racking load capacity of the base version is 400 kg. Thanks to its modular design, the CS3 can also be configured for higher loads. The pallet deck can be reinforced with reinforcement profiles. By fitting up to 4 corrosion-resistant reinforcement profiles - immediately or later - the CS3-ECO can easily be upgraded from a medium-duty pallet to a true racking pallet with a load capacity of up to 1400 kg.

The CS3-ECO can also be supplied as standard with 22 mm rims positioned along the pallet deck. This keeps the usable deck size at 1200 x 1000 mm. VDA-KLT automotive bins, with their different base dimensions, fit this pallet variant without any issues.

For use in automated warehouses, for example where driven rollers and braking rollers are used, the CS3-ECO skids can optionally be equipped with anti-slip.

For tracking and tracing, CS3-ECO pallets can be equipped with RFID transponders - even retrofitted later.

For applications involving sensitive electronics, CS3 pallets can be supplied as an ESD version as standard. These pallets have electrically conductive properties, preventing electrostatic build-up and harmful discharge.

In short, the CS3-ECO has a stable base that can be fully customised for a wide range of applications. This ensures the pallet is never over-engineered and can also be offered at an attractive price.

Matching accessories



83291800



99.49716

Alternative articles



83335241



83325201

Transoplast
+31(0)314 66 44 00
website@transoplast.com
transoplast.com