
Article number: 83310241 Printing possible

# Industrial pallet D3-5 ECO – 1200 x 1000 mm – with 5 runners - with 7 mm rims – black





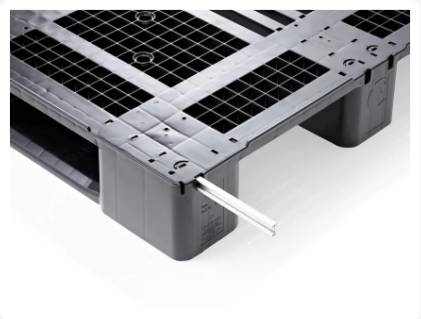

TRANSOPLAST
Improves your Logistics

**Transoplast**
+31(0)314 66 44 00
website@transoplast.com
transoplast.com

## Product specifications

| | |
|---|---|
| External dimensions ( L x W x H) | 1200 × 1000 × 150 mm |
| Dynamic load capacity | 1000 kg |
| Material | Recycled ECO-HDPE |
| Article number | 83310241 |
| Weight (kg) | 15 kg |
| Temperature range | -30°C to +40°C, briefly up to +90°C |
| Color | Black |
| Static load capacity | 5000 kg |
| Edge height | 7 mm |
| Load capacity in racks | 400 |
| Quantity per pallet | 16 |

## Properties

- **Industrial pallet / ISO pallet type D3-5 ECO (1200 x 1000 x H 150 mm) with 7 mm raised rims around the deck**
- **Strong medium-duty pallet with low tare weight; easy to handle**
- **Equipped with 5 pallet skids: 3 longitudinal and 2 transverse**
- **Load capacity can be significantly increased by adding corrosion-resistant reinforcement profiles in the pallet deck**
- **Racking load capacity is 400 kg. When 3 longitudinal inserts are added, this increases to 1000 kg; with 4 longitudinal inserts, racking load capacity reaches 1250 kg**
- **Undersides of blocks and skids open with reinforcement ribs**
- **The D3-5 ECO pallet is extra strong due to the angled connection between skids and blocks**
- **Pallet skids are bevelled on both sides for smooth handling**
- **Made from high-quality ECO regranulate for high impact resistance and long service life**
- **The D3-5 ECO pallet is widely used for custom-made plastic pallets – with or without reinforcement profiles in the deck**
- **Options: Pallet lid / pallet cover – fit-on rims – QR codes and barcodes – RFID transponders – 22 mm deck rims – 22 mm rims beside the deck – rimless version (optional with pop-ups) – continuous anti-slip rubber strips for the deck**

## Description

Our D3-5 ECO plastic pallet is a true all-rounder and is therefore widely used throughout the logistics sector, particularly for medium-duty applications. Companies in the non-food sector as well as industry and trade successfully rely on this pallet. The pallet has a low tare weight, making it easy to handle. The D3-5 ECO can be upgraded from a medium pallet to a genuine rackable pallet by adding reinforcement profiles.

This D3-5 variant is equipped with 7 mm raised rims around the entire pallet deck. This prevents loads from slipping and stops empty pallets from sliding over one another. The D3-5 pallet has additional reinforcement at several potentially sensitive points, such as the transitions between pallet blocks, skids and the pallet deck. Manufactured from high-quality HDPE ECO regranulate for long-lasting use.



**Transoplast**
+31(0)314 66 44 00
website@transoplast.com
transoplast.com

## Matching accessories



83291800



99.49716

## Alternative articles



83291800



99.49716

**Transoplast**
+31(0)314 66 44 00
website@transoplast.com
transoplast.com